

No. 6370ZNR-20

Pull-stud K20 for engagement screw M12 with reduced fitting collar

Hardened, for clamping modules size K20.



NEW!



Order no.	Size	dia. DN	dia. D1	dia. D2	H	H1	M	T	Weight [g]
562761	K20	32,0	24	12	28	23	-	5	110
562764	K20	32,0	24	12	28	23	-	5	110
562766	K20	31,8	24	12	28	23	-	5	110
303172	K20	31,8	-	-	-	-	M 8	-	110

Design:


Order no. 562761: zero point pull-stud, order no. 562764: timing pull-stud, order no. 562766: undersize pull-stud, order no. 303172: protection pull-stud

Application:

For clamping in a fitting hole with a reduced diameter e.g. before heat treatment of a workpiece. After the boring out the hole, the respective standard pull-stud can be used.

On request:

Protection pull-stud made of plastic.

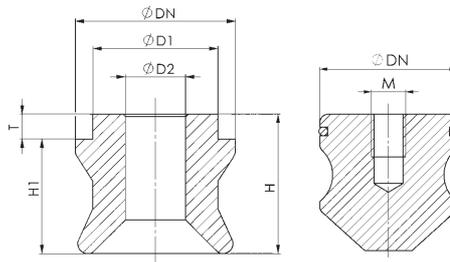

No. 6370ZN-20

K20 pull-stud with colour coding for M12 engagement screw

Hardened, for clamping module size K20.



Order no.	Size	dia. DN	dia. D1	dia. D2	H	H1	T	Weight [g]
430322	K20	32,0	25	12	28	23	5	110
430348	K20	32,0	25	12	28	23	5	110

Design:

Extremely wear-resistant surface coating. Order no. 430322: zero point pull-stud „Gold“, order no. 430348: timing pull-stud „Black“.

Application:

For simple, visual differentiation of the various pull-studs.

Note:

The timing pull-stud has an additional alignment bore, which can optionally be used for simple installation.

No. 6370ZN-20

K20 pull-stud for M16 engagement screw

Hardened, for clamping modules size K20.



Order no.	Size	dia. DN	dia. D1	dia. D2	H	H1	M	T	Weight [g]
554939	K20	32,0	25	16	28	23	-	5	85
554940	K20	32,0	25	16	28	23	-	5	85
554941	K20	31,8	25	16	28	23	-	5	85
303172	K20	31,8	-	-	-	-	M 8	-	110

Design:

Order no. 554939: zero point pull-stud, order no. 554940: timing pull-stud, order no. 554941: undersize pull-stud, order no. 303172: protection pull-stud

Note:

The timing pull-stud has an additional alignment bore, which can optionally be used for simple installation.

On request:

Protection pull-stud made of plastic.