


Clamping elements

No. 6966R





Order no.	Article no.	Span H max.	А	В	С	E	Weight
		[mm]					[g]
562216	6966R-01-00	8	61	24	15	52	559

Design:


Case-hardened steel, burnished.

Application:

For clamping tongs 6966-01. The clamping lever blank can be adjusted according to the shape of the workpiece.

Note:

The span H can be increased as required, but it must be noted that shear forces of more than 8 mm can occur!




No. 6966DF

Filter plate







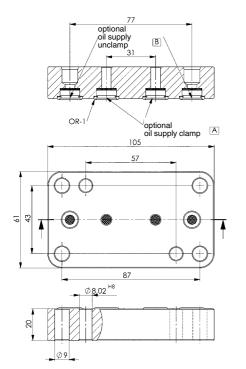



Order	Article no.	max. pressure range	Filteration	OR-1 O-ring	Weight
no.		[bar]	[µm]	Order No.	[g]
562218	6966DF-07-100	250	100	466334	320

Design:

Filter plate and filter sleeve made of aluminium, black anodised. Filter plates made of metal mesh.

Application:


Used to protect the 6966D-07 clamp from contamination in clamping devices

If a finer strainer is required, this can be easily replaced. The finer the filter selected, the greater the flow resistance.

Replacement filter:

Filter, plug-in design 25 μm , order no. 562203 Filter, plug-in design 40 $\mu m,$ order no. 562204 Filter, plug-in design 100 μm , order no. 562205

Drilling template device:



Subject to technical alterations.